


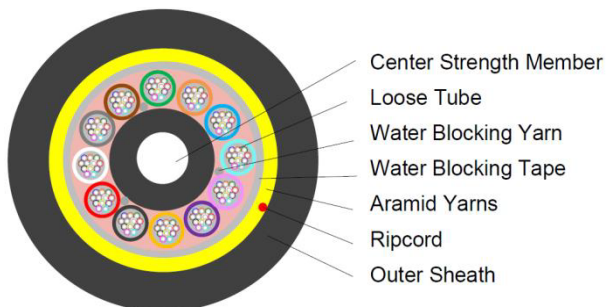

ADSS - 144C SINGLE JACKET

Span 100m

PBT loose tube

Identification of product		ADSS-144B1.3-PE-100M CABLE	
Product application Aerial installation		Product information	
		Fiber	G652D
Reference specification - IEC-60794-1-21 - YD/T 1460.4 - YD/T 3350.1-2018		Fiber Color Code	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Turquoise
		Loose tube color	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Turquoise
		Loose tube diameter	2.1mm
		Center strength member	FRP+PE
		Center strength memberΦ	6.2mm
		Water blocking mode	Water Blocking Yarn+ Water Blocking Tape
		Strength member	Aramid Yarn
		Ripcord	1 Polyester yarn
		Sheath diameter	14.6±0.5 mm
		Material	MDPE
Packaging 4000m/drum - Drum size: 1400*500*1110mm		Cable color	Black
		Cable weight	170kg/km
		Cable marking	As per customer requirements
		Properties of products	
		Rated Tensile Strength (RTS)	7800N
		Maximum Allowable Tension (MAT)	3100N
		Every Day Strength (EDS)	2100N
		Min. Bending Radius	Short term: 20D Long term : 10D
		Crush Performance	Short term: 1000N/100mm Long term : 300N/100mm
		Suiting Line Voltage Class	Not more than 35kV
		Meteorological condition	1.Wind : 25m/s 2.Ice : 0mm 3.Sag : 1.0% 4.Span : 100m
		Temperature Range	-40 -+70 when working or store -10 -+50 when laying



+17863204446
+14073606163



8318 VIVARO ISLE WAY,
WINDERMERE FL.



SALES@ACLFIBER.COM



+17863204446
+14073606163



8318 VIVARO ISLE WAY,
WINDERMERE FL.



SALES@ACLFIBER.COM